

# CONNECTED

## switch gear®



## Socket Outlet Pendant SP310, SP315



### Specifications

Connection type	Double Pole
Supply voltage	230-240V ac +/-10%
Frequency	50Hz
Max current	10amp, 15amp
Size of Flexible Cord	10A(1.5mm <sup>2</sup> ) 15A(2.5mm <sup>2</sup> )
Compliance	AS/NZS 3120 AS/NZS 3112
Approval	SAA
Required Compliance Mark	5453

### Features and Applications:

The Connected Switchgear Socket Pendant Outlet is designed for use in Industrial applications, where access to power should be suspended overhead. The casing of the SP series product is made from high quality impact and chemical resistant material to give superior performance and protection in Industrial applications.


Switching of power to the outlet is double pole in accordance with AS/NZS 3120

Available in both 10 and 15amp models

### Wiring Instructions:

1. Connect the Earth wire(Green/Yellow) to the terminal marked "⊕"
2. Connect the Active wire to the terminal marked "A"
3. Connect the Neutral wire to the terminal marked "N"
4. Tighten cord clamp around outer sheath of the flexible cord.
5. Check the wires are in their correct position as illustrated and the terminal screws are tight.
6. Slide the Outlet cover over the switch mechanism and make sure the screws are fully tightened

### Wiring Diagram:

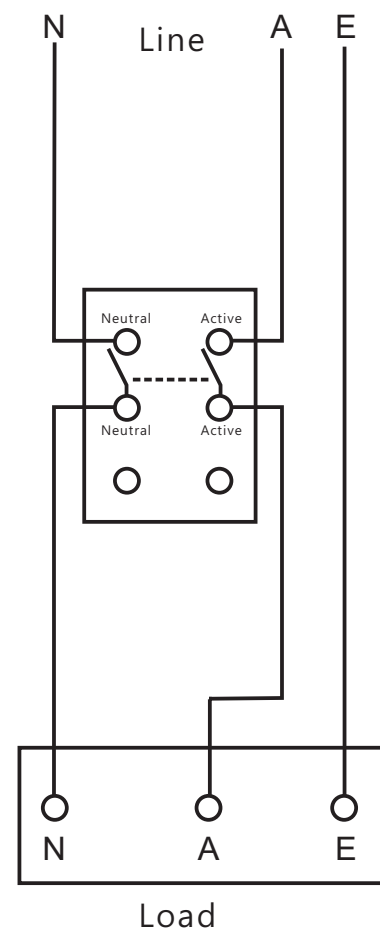

*This product is covered by an Inhouse warranty period of 5 years.  
Please visit [www.connectedswitchgear.com.au](http://www.connectedswitchgear.com.au) for terms of warranty.*

*We will turn you on®*