

CONNECTED  
switch gear®  
*We will turn you on®*

IMPACT



Series



## IP66 Industrial Range Isolator Disconnectors

TRUSTED

★  
★  
★  
**5**  
★  
★  
★  
YEAR  
WARRANTY  
IN HOUSE


Data Specification 2018  
1300 071 378

## Description

The IMPACT S Series 3/4 size switch disconnectors are the latest in design from Connected Switchgear featuring a unique curved cover. They are made from impact and chemical resistant polycarbonate material. The IMPACT S switch disconnectors are tested to achieve IP66 protection rating and toggles are lockable with ON and OFF identification. Available in single and three pole up to 63amp and come complete with screw caps. 63amp 32mm conduit entries and seals are silicone based.

## Features

- Impact and Chemical Resistant
- Multiple Conduit Entries
- Available in 20 to 63amp
- Lockable Toggle with ON/OFF Identification
- Screw Caps Included

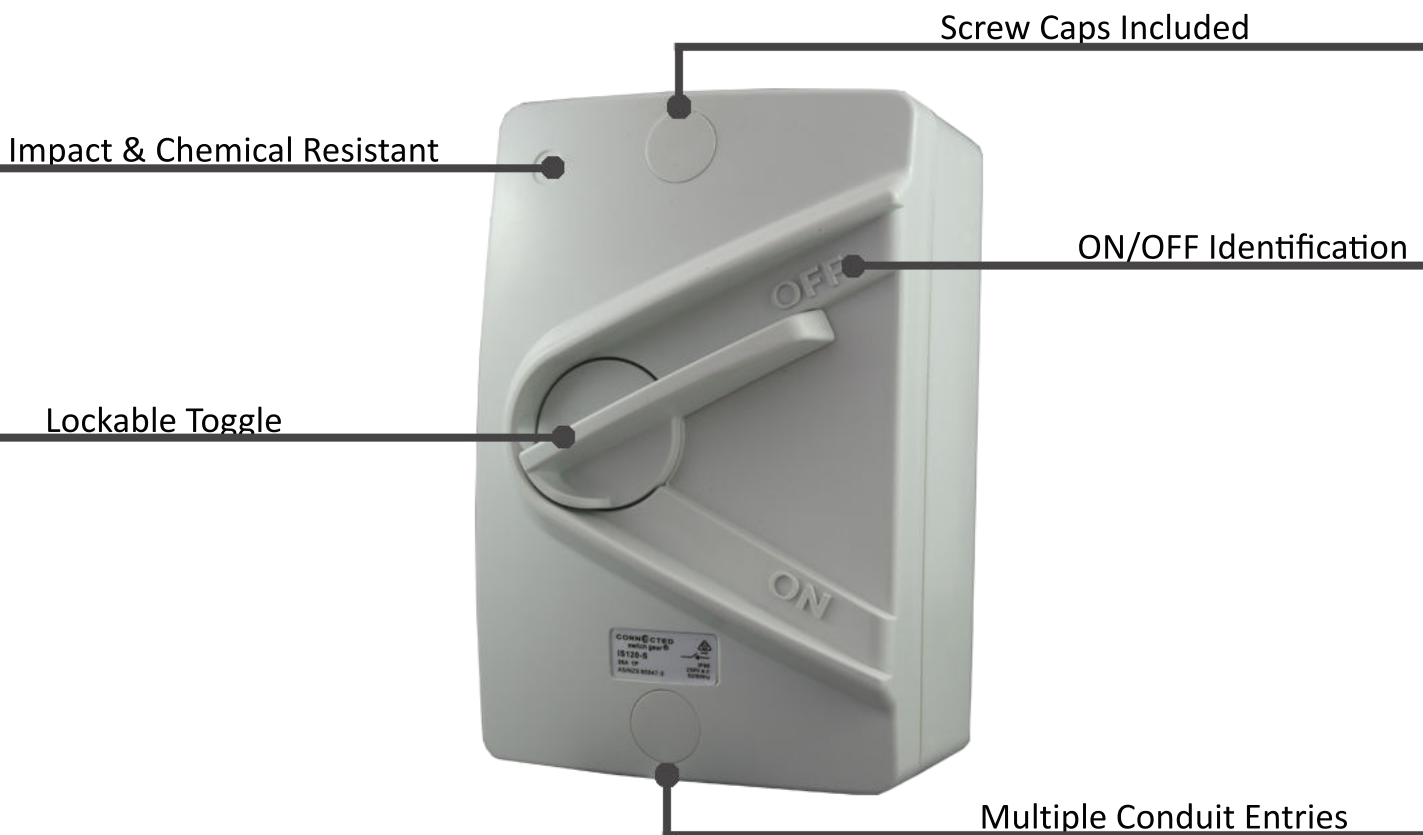

## Approvals

SAA Approved

## Technical Parameters

- Rated Voltage: 250V/500V AC
- Rated Frequency: 50/60Hz
- Operating Temp: -40°C - 80°C
- IP Protection: IP66
- Complies with AS/NZS3123, 3947
- Utilisation Category: AC23A

## Specifications

Product Code	Rating (Amps)	Designation	Length (mm)	Width (mm)	Height (mm)	Conduit Entries
IS120-S	20A	Single Pole	162	80	87	4 x 25mm
IS132-S	32A					4 x 25mm
IS163-S	63A					2 x 25mm, 2 x 32mm, 1 x 32mm Conduit Adaptor
IS320-S	20A	Three Pole	162	80	87	4 x 25mm
IS332-S	32A					4 x 25mm
IS363-S	63A					2 x 25mm, 2 x 32mm, 1 x 32mm Conduit Adaptor

## Related Products



*Combination Switched Outlets and Socket Outlets are also available in the IMPACT S Series*