


Description

The FUSION Series range of circuit protection has been designed to comply with AS/NZS61008.1 and are made from the highest grade components to ensure reliability in all applications where the protection against earth leakage and residual current is required. The 10kA rated breaking capacity of these residual current devices makes them the perfect choice for ultimate safety protection in a wide variety of applications. Available in 1P+N and 3P+N, 40 and 63amps.

Features

- ON/OFF Indicators
- Up to 35mm² Cable
- Tripping Time: 30mA
- 35mm DIN Rail Mounting
- Lockable Toggle

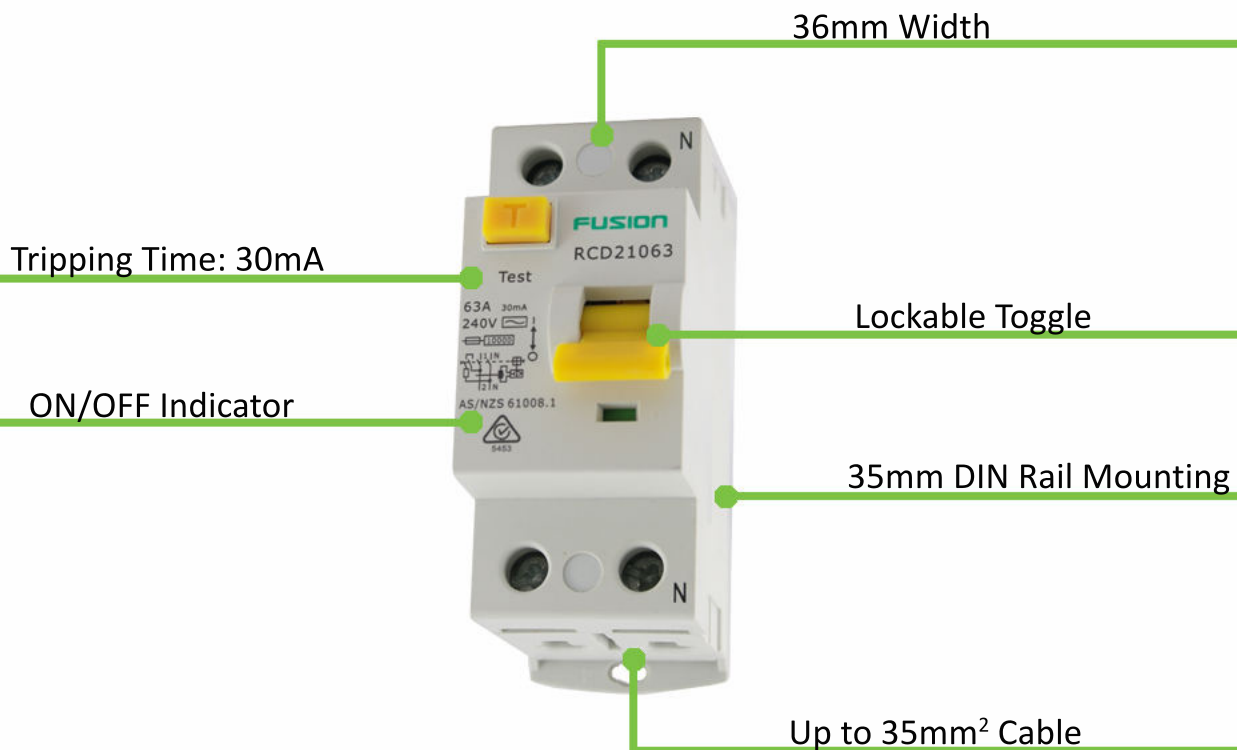

Approvals

Energy Safe Victoria

Technical Parameters

- Rated Voltage: 250V ac. 4 Pole 415V ac.
- Rated Frequency 50Hz / 60Hz
- Rated Current: 10000a
- Complies with AS/NZS 61008.1

Specifications

Product Code	Description	Poles	Voltage (V)	Amperage (kA)
RCD21040	Residual Current Device	2	250V	40A
RCD21063	Residual Current Device	2	250V	63A
RCD41040	Residual Current Device	4	415V	40A
RCD41063	Residual Current Device	4	415V	63A

Related Products



Go to www.connectedswitchgear.com.au for
Connected Switchgears' full range of
Circuit Protection